

AC Power Supply for AccessWay Enclosure Installation Instructions [Release 1]

Overview


This document explains how to install an AC power module in an AccessWay enclosure.

Installation


Installation

Installing an AC Power Module

Install a power module in an AccessWay enclosure as follows.

	Action
1	 Warning! The AccessWay enclosure power module should be installed and removed only by a trained service person. Le module d'alimentation électrique de l'enceinte AccessWay doit être installé et retiré par un réparateur expérimenté. Ein- und Ausbau des AccessWay Schaltschranks ist von einem geschulten Wartungstechniker vorzunehmen.
2	If there is a power module present in the AccessWay, continue with the next step. If not, skip to Step 7.
3	Disconnect the power cord from the back of the AccessWay.
4	Remove the two 6-32x.25 LG PH SEMS screws from the front top and bottom tabs of the power module in the AccessWay. Save the screws.
5	Loosen the four retained panel screws at the back of the AccessWay, around the back panel power module cutout.
6	Remove the power module by pulling it out from the front of the AccessWay (Figure1).
7	Slide the replacement power module in the front of the AccessWay, pushing it in as far as it will go.
8	Insert the two screws (from Step 4) in the front top and bottom tabs of the power module and tighten until they are snug.
9	Tighten the four retained panel screws at the back of the AccessWay, around the back panel power module cutout.

Installation

Action	
10	<div style="display: flex; align-items: center;">  <div> <p>Caution!</p> <p>Do not connect power to the AccessWay until Steps 10 and 11 been performed. Failure to complete these steps first could result in damage to the AccessWay. Ensure that the power cord is disconnected from the AccessWay before proceeding.</p> <p>Check the power supply line voltage setting as follows:</p> <ol style="list-style-type: none"> a) Note the currently-selected voltage in the power entry unit window at the back of the AccessWay (Figure2). b) Note the AccessWay product code, on a label inside the front door. c) Compare the voltage setting and product code to the Voltage Selector Switch Settings table in this document. </div> </div>
11	<p>If the voltage setting is not correct, change it as follows:</p> <ol style="list-style-type: none"> a) Open the power entry unit cover using a small blade screwdriver. b) Insert the tool into the voltage selection slot and remove the 4-voltage selection wheel. c) Reset the voltage selection. d) Install the wheel in the power entry unit and close the cover. Ensure that the selected voltage appears in the window.
12	Connect the power cord to the AccessWay.
13	AC power module installation is complete.

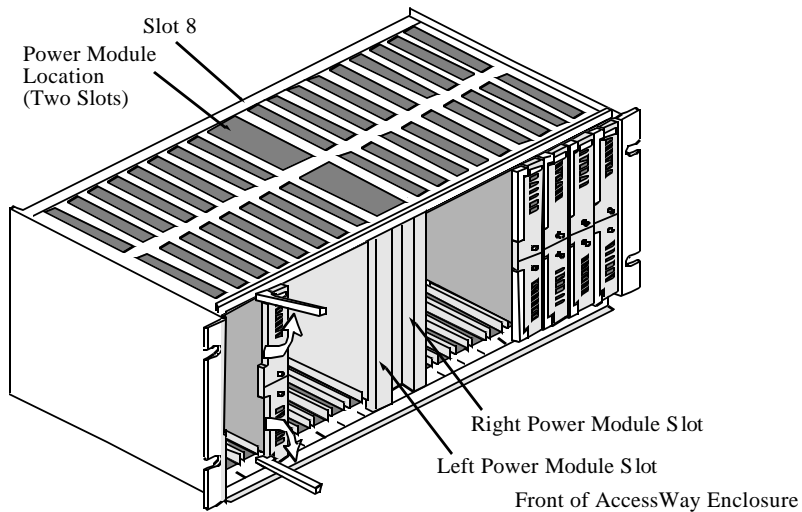


Figure 1. AccessWay Power Module Locations

Installation

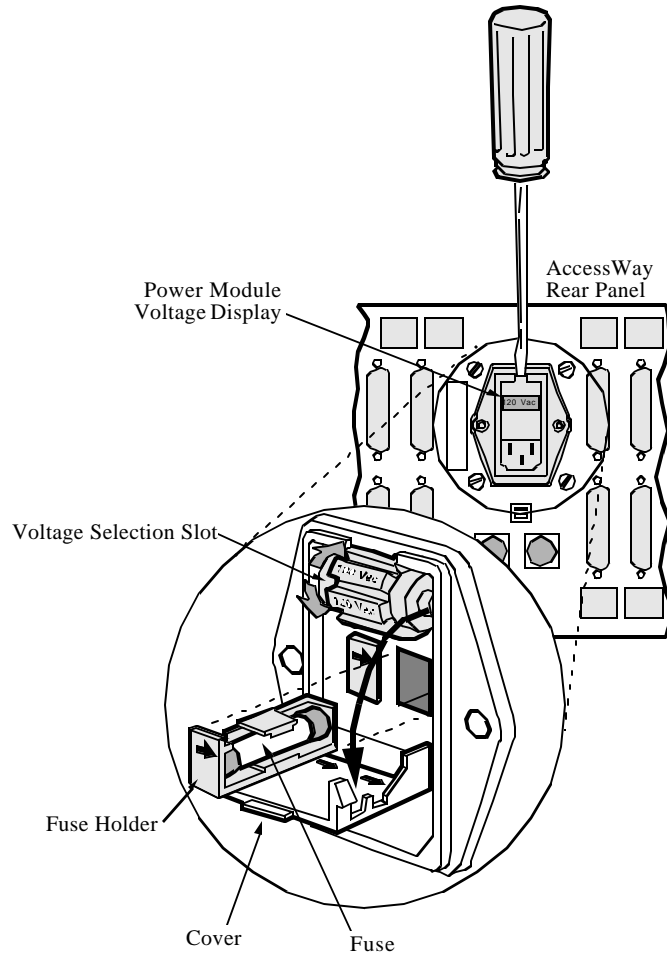


Figure 2. AC Power Module Voltage Selection

Voltage Selector Switch Settings

The AccessWay power module line voltage selections are as follows.

<i>If the AccessWay Product Code is:</i>	<i>Use This Voltage Selection:</i>
39706, 39712, 39713	100 VAC
39700, 39701, 39708	120 VAC
39702, 39703, 39709	220 VAC
39704	240 VAC